

Maschinenserie: AHP

Horizontal Pillow Bag Machine – Film feeding from the bottom




Speed:
Up to 60 pcs/min

Technical Details:

- Steel frame / stainless steel construction
- The products are transported by gripper loading
- Teflon-coated sealing stamps, permanently heated
- simple touchscreen operation via color symbols
- continuous feeding of the products by photocell control
- Safety protection covers / alarm signal lamp
- 3-sided sealed seam packaging (fin seam)



Bag Dimensions:

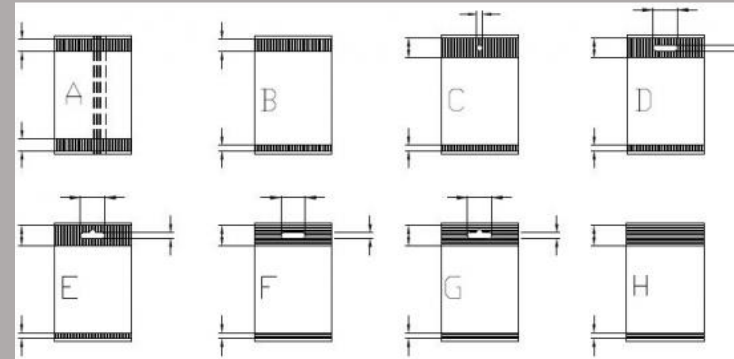

Applicable Products:

Our AHP series (film from below) reliably packages the following products:

- Medical products
- Fruit and vegetables
- Technology
- Biscuits
- Frozen food

Model	AHP— 500-3S-BR	AHP-500- 4S-BRI	AHP-600- 3S-BR	AHP-600- 4S-BM	AHP-700- BM	AHP-70 0-4S-BRI
Usable films:	PP / POF / Composite films	PP / POF / Composite films	PP / POF / Composite films	PP / POF / Composite films	PP / POF / Composite films	PP / POF / Composite films
Speed:	Up to 120 pcs/min	Up to 60 pcs/min	Up to 120 pcs/min	Up to 60 pcs/min	Up to 70 pcs/min	Up to 60 pcs/min
Sealing Mechanism 1 & 2:	longitudinal, rotation, servomotor	longitudinal, rotation, servomotor	longitudinal, rotation, servomotor	longitudinal, rotation, servomotor	-	longitudinal, rotation, servomotor
Max. Film Width:	-	700 mm	-	600 mm	-	700 mm
Max. Bag Length:	-	50-600 mm*	-	50-600 mm*	-	50-600 mm*
Max. Sealing Height:	-	120 mm*	-	120 mm*	-	120 mm*
Max. Product Height:	-	-	120 mm*	-	120 mm*	-
Max. Product Width:	-	-	280 mm*	-	-	-
Max. Roll Size:	-	-	600 x Ø 300 mm	-	-	-
Max. Connected Load:	-	-	3,5 kW	-	6 / 9 kW	-
Supply Voltage:	-	-	400 V / 3-phases	-	400 V / 3-phases	-